


BIOBOR® ColdFlo® with... LubriBor®

Diesel Fuel Anti-Gel with Lubricity

CFPP Performance of Biobor® ColdFlo® at 1 : 1,500 in Various Fuels

Using Industry Standard Testing ASTM D6371-05 (2010) - Cold Filter Plug Point Test

Average CFPP Reduction = 24.4° F

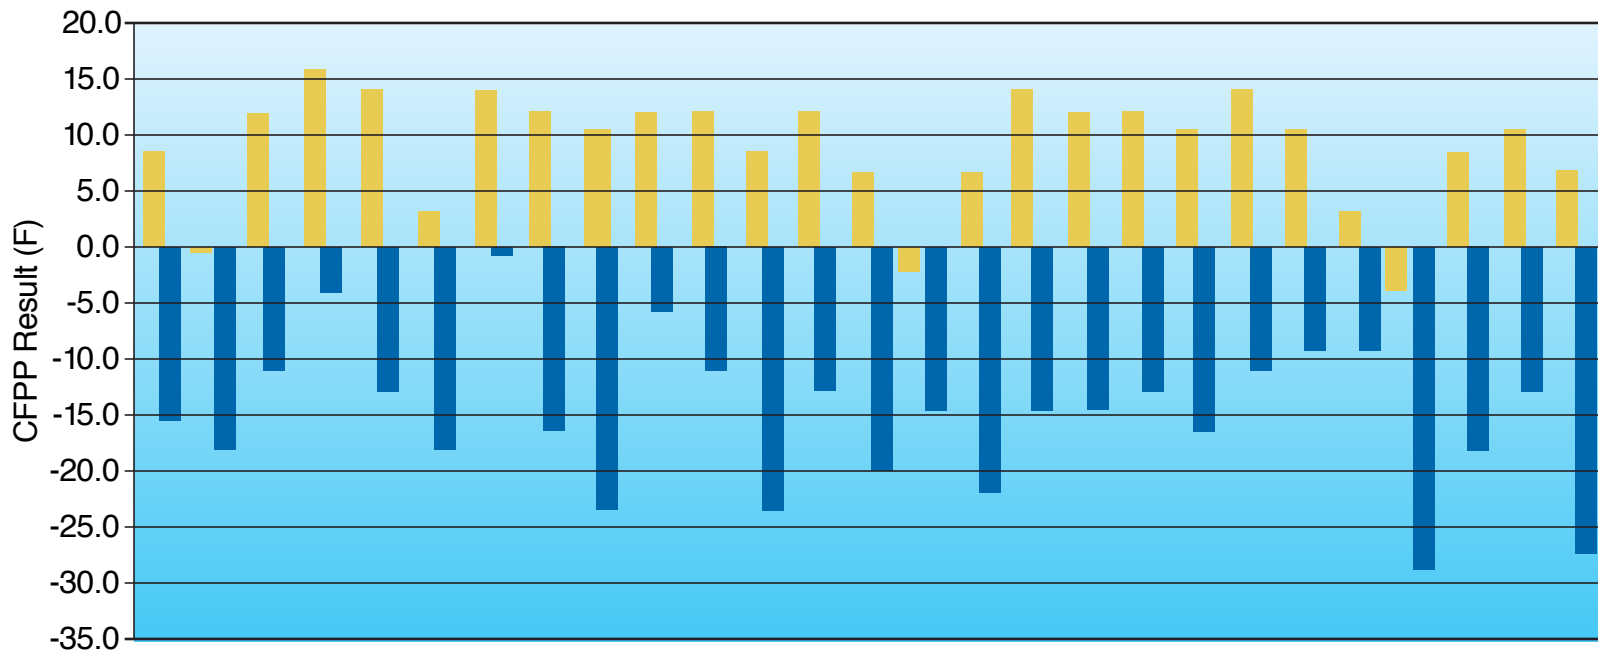


TREATMENT RATES
1 gal. to every 1,500 gal. of fuel

32 oz.	1 gal.	5 gal.	55 gal.
375 gal.	1,500 gal.	7,500 gal.	82,500 gal.

Use at a ratio of 1 gallon to every 1,000 gallons for extreme conditions.

Available in...
Quarts, 1 Gal., 5 Gal.
55 Gal. Drum, 330 Gal. Totes

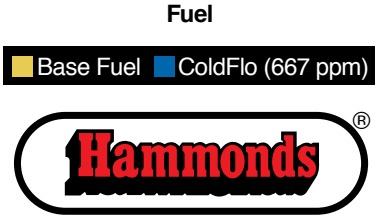

FUEL ADDITIVES
www.biobor.com

PLUS adds Lubricity to protect injectors and pumps. 13.8% reduction in wear scar. ASTM D6079 HFRR Fuel Lubricity Testing