


# **BIOBOR® ColdFlo®** with... **LubriBor®**

Diesel Fuel Anti-Gel with Lubricity

## **CFPP Performance of Biobor® ColdFlo® at 1 : 1,500 in Various Fuels**

Using Industry Standard Testing **ASTM D6371-05 (2010)** - Cold Filter Plug Point Test

**Average CFPP Reduction = 26.6° F**

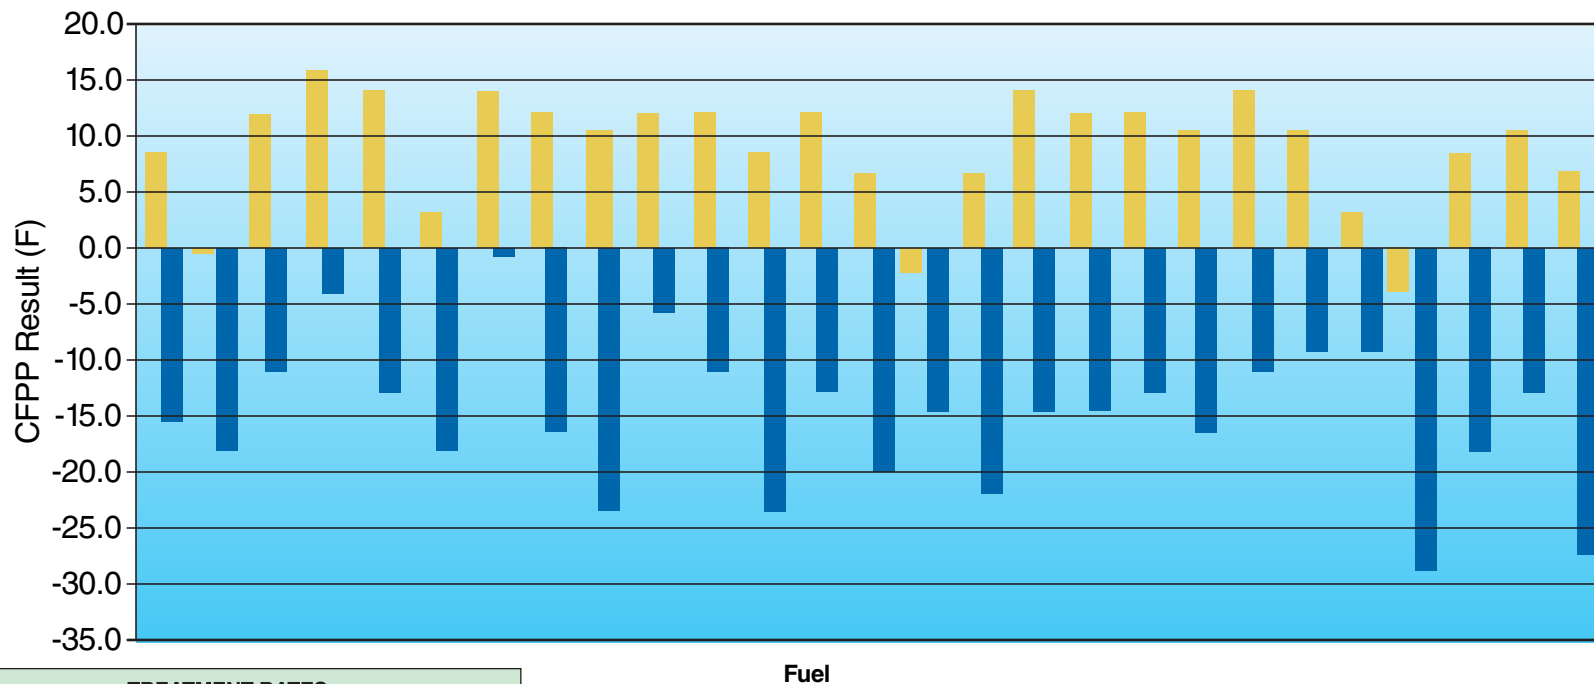

### TREATMENT RATES

1 gal. to every 1,500 gal. of fuel

32 oz.	1 gal.	5 gal.	55 gal.
375 gal.	1,500 gal.	7,500 gal.	82,500 gal.

Use at a ratio of 1 gallon to every 1,000 gallons for extreme conditions.

Available in...  
Quarts, 1 Gal., 2.5 Gal., 5 Gal.  
55 Gal., 330 Gal., Bulk

Fuel

■ Base Fuel ■ ColdFlo (667 ppm)



FUEL ADDITIVES

[www.biobor.com](http://www.biobor.com)

**PLUS adds Lubricity to  
protect injectors and pumps.  
13.8% reduction in wear scar.  
ASTM D6079 HFRR  
Fuel Lubricity Testing**