


FUELSTAT®

The test for microbial contamination in jet and diesel fuels

From **sample to report** in less than 15 minutes with **FUELSTAT® Result**

FUELSTAT® ANALYSIS REPORT																												
Company name: Standard Address inputted From Portal Registered User: Engineers Name Address: Input from Portal Registered Address Test date: 24-JAN-2019 Post code: From Portal GPS location: Country: United Kingdom Fuelstat result number: 3,361 Customer reference: 124 - Portal Template Printout date: 24-JAN-2019																												
Identity: Example Test Asset: Jet 1 Tank: Wing Fuel lot: 4 Fuelstat test lot: HR 2 411	Bacteria: Negligible Fungi: Heavy Hormoconis resinae: Negligible Overall result: Heavy Test method: ASTM D8070-16																											
Comments Example test Report - Annual Maintenance Check																												
FUELSTAT® Result data interpretation and guidance <table border="1"> <thead> <tr> <th>Alert level</th> <th>Phase</th> <th>Target antigen limits</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Negligible</td> <td>Fuel</td> <td>Up to 150 µg/L</td> </tr> <tr> <td>Water</td> <td>Up to 33 µg/ml</td> </tr> <tr> <td colspan="3">Negligible — Maintain good housekeeping practices.</td> </tr> <tr> <td rowspan="2">Moderate</td> <td>Fuel</td> <td>Between 150–750 µg/L</td> </tr> <tr> <td>Water</td> <td>Between 33–166 µg/ml</td> </tr> <tr> <td colspan="3">Moderate — Repeat the test to confirm the result and increase the frequency of water drainage.</td> </tr> <tr> <td rowspan="2">Heavy</td> <td>Fuel</td> <td>Greater than 750 µg/L</td> </tr> <tr> <td>Water</td> <td>Greater than 166 µg/ml</td> </tr> <tr> <td colspan="3">Heavy — Increased water drainage and/or biocide treatment. Seek further advice if required.</td> </tr> </tbody> </table>		Alert level	Phase	Target antigen limits	Negligible	Fuel	Up to 150 µg/L	Water	Up to 33 µg/ml	Negligible — Maintain good housekeeping practices.			Moderate	Fuel	Between 150–750 µg/L	Water	Between 33–166 µg/ml	Moderate — Repeat the test to confirm the result and increase the frequency of water drainage.			Heavy	Fuel	Greater than 750 µg/L	Water	Greater than 166 µg/ml	Heavy — Increased water drainage and/or biocide treatment. Seek further advice if required.		
Alert level	Phase	Target antigen limits																										
Negligible	Fuel	Up to 150 µg/L																										
	Water	Up to 33 µg/ml																										
Negligible — Maintain good housekeeping practices.																												
Moderate	Fuel	Between 150–750 µg/L																										
	Water	Between 33–166 µg/ml																										
Moderate — Repeat the test to confirm the result and increase the frequency of water drainage.																												
Heavy	Fuel	Greater than 750 µg/L																										
	Water	Greater than 166 µg/ml																										
Heavy — Increased water drainage and/or biocide treatment. Seek further advice if required.																												

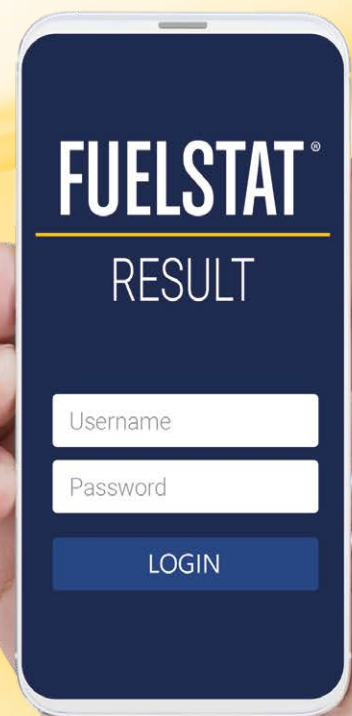

FUELSTAT®

- **Lowest** cost to result of any test on the market
- The **ONLY** true on-site test that gives dependable results even in the dirtiest of conditions

Tried and trusted globally. Unique innovative solution leads to huge growth of **FUELSTAT®**

FUELSTAT® PROTECTS

tests sold 120,000 per annum	over 130 countries globally	more than 400 airlines	more than 10 major oil companies
---	---	-------------------------------------	--

FUELSTAT® SAVES

cost reduction, less
effort, less time

50%
savings

labour hours saved

+1,000,000

**FUELSTAT® has OEM listings from
Airbus, Bombardier, Embraer, Fokker amongst others...**



FUELSTAT® meets the ASTM International
D8070-16 Standard



FUELSTAT® is listed as an approved
product by Joint Inspection Group



FUELSTAT® is listed as a recommended
product by IATA. Conidia Bioscience is a
Strategic Partner with IATA.

FUELSTAT® Plus

- Ultra simple test that requires **4 drops** of sample
- **15 minutes** to result as opposed to 4-7 days!



Dependable Results Even in the Dirtiest Conditions

FUELSTAT®

- Unique immunoassay technology
- Detects only specific microorganisms

FUELSTAT®


- Carried out on site, so complying with ASTM D6469 - testing for contamination within 24 hours
- Avoids time delays and expense associated with sample transportation to laboratory



Microbial Contamination **causes massive unplanned costs and disruption**

- Catastrophic effects such as blocked fuel systems, damaged fuel probes and corroded tanks
- Repair and replacement costs can be \$millions if left to develop
- Disruption to use of assets can cause substantial operational problems



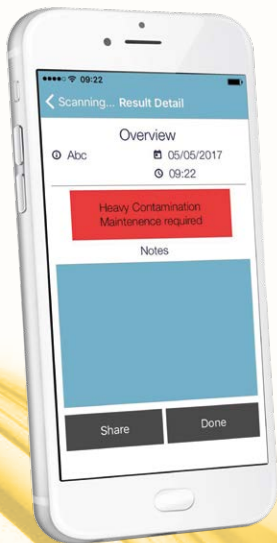


Data Management: Real Time Reporting Easy to download app

- Available on IOS and Android Smartphones
- Instant verification of result and transfer of data

FUELSTAT® Report.

- Excel format
- All microbial testing data on one spreadsheet

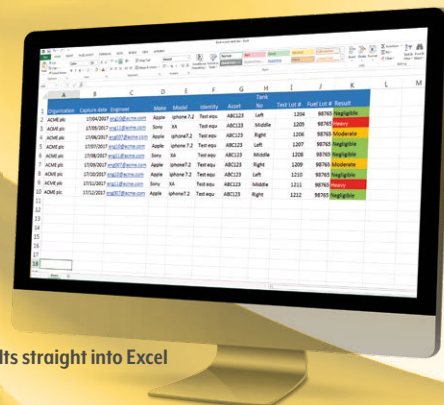


Results straight into Excel

FUELSTAT® ANALYSIS REPORT																															
Company name: Standard Address inputted From Portal Address: Input from Portal Registered Address Post code: From Portal Country: United Kingdom Customer reference: 124 - Portal Template																															
Registered User: Engineers Name Test date: 24-JAN-2019 GPS location: Fuelstat result number: 3,361 Printout date: 24-JAN-2019																															
Identity: Example Test Asset: Jet 1 Tank: Wing Fuel lot: 4 Fuelstat test lot: HR 2 411	Bacteria: Negligible Fungi: Heavy Hormoconis resinae: Negligible Overall result: Heavy Test method: ASTM D8070-16																														
Comments Example test Report - Annual Maintenance Check																															
FUELSTAT® Result data interpretation and guidance <table border="1"> <thead> <tr> <th>Alert level</th> <th>Phase</th> <th>Target antigen limits</th> </tr> </thead> <tbody> <tr> <td>Negligible</td> <td>Fuel</td> <td>Up to 150 µg/L</td> </tr> <tr> <td></td> <td>Water</td> <td>Up to 33 µg/ml</td> </tr> <tr> <td colspan="3">Negligible — Maintain good housekeeping practices.</td> </tr> <tr> <td>Moderate</td> <td>Fuel</td> <td>Between 150-750 µg/L</td> </tr> <tr> <td></td> <td>Water</td> <td>Between 33-166 µg/ml</td> </tr> <tr> <td colspan="3">Moderate — Repeat the test to confirm the result and increase the frequency of water drainage.</td> </tr> <tr> <td>Heavy</td> <td>Fuel</td> <td>Greater than 750 µg/L</td> </tr> <tr> <td></td> <td>Water</td> <td>Greater than 166 µg/ml</td> </tr> <tr> <td colspan="3">Heavy — Consider remedial treatment, such as increased water drainage and/or biocide treatment. Seek further advice if required.</td> </tr> </tbody> </table>		Alert level	Phase	Target antigen limits	Negligible	Fuel	Up to 150 µg/L		Water	Up to 33 µg/ml	Negligible — Maintain good housekeeping practices.			Moderate	Fuel	Between 150-750 µg/L		Water	Between 33-166 µg/ml	Moderate — Repeat the test to confirm the result and increase the frequency of water drainage.			Heavy	Fuel	Greater than 750 µg/L		Water	Greater than 166 µg/ml	Heavy — Consider remedial treatment, such as increased water drainage and/or biocide treatment. Seek further advice if required.		
Alert level	Phase	Target antigen limits																													
Negligible	Fuel	Up to 150 µg/L																													
	Water	Up to 33 µg/ml																													
Negligible — Maintain good housekeeping practices.																															
Moderate	Fuel	Between 150-750 µg/L																													
	Water	Between 33-166 µg/ml																													
Moderate — Repeat the test to confirm the result and increase the frequency of water drainage.																															
Heavy	Fuel	Greater than 750 µg/L																													
	Water	Greater than 166 µg/ml																													
Heavy — Consider remedial treatment, such as increased water drainage and/or biocide treatment. Seek further advice if required.																															
Phone make: Apple Phone model: iPhone 6s App version:	Portal version: 1.2.2 Analysis approved by:																														
<small> Disclaimer — FUELSTAT® Result is designed for use with tests which are fully compliant with ASTM D8070-16. However, readings obtained using FUELSTAT® Result are currently outside the scope of ASTM D8070-16. Operators should visually validate test results as per ASTM D8070-16. The accuracy of this report may be dependent on the accuracy of the sample provided. Full terms of use available on the Conidia Bioscience Ltd. website www.conidia.com. For Any Technical Assistance Telephone: +44 (0)1491 829102 Conidia Bioscience Limited: 3 Acorn Business Centre, Northbarrow Road, Cosham, Portsmouth, PO6 3TG, United Kingdom. Registration number: 03965471 VAT number: 760 2156 55 www.conidia.com </small>																															

Analysis Report.

- Fully detailed report can be instantly produced in PDF format

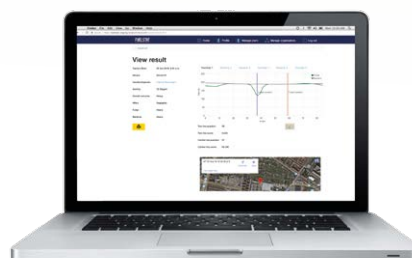

The FUELSTAT® Solution

As simple as 1-2-3

Test. Result. Report.



FUELSTAT® Plus Test


1

- Accurate results anywhere, carried out by anyone, and learned in minutes
- Immediate decisions can be made without delay
- Results within 15 minutes

FUELSTAT® Result

2

- Reduces risk of misinterpretation
- Immediate visual verification of result
- No need for additional equipment other than a smartphone

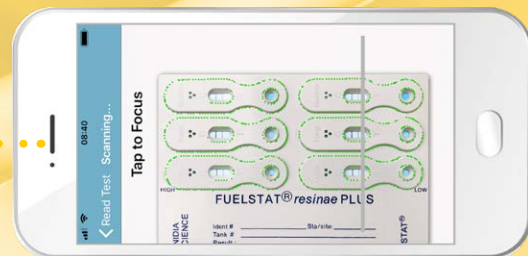

FUELSTAT®

ANALYSIS REPORT

Company name:

Standard Address inputted From Portal

Registered User:

Engineers Name

Address:

Input from Portal Registered Address

Test date:

24-JAN-2019

Post code:

From Portal

GPS location:

Country:

United Kingdom

Fuelstat result number:

3,361

Customer reference:

124 - Portal Template

Printout date:

24-JAN-2019

Identity:

Example Test

Asset:

Jet 1

Tank:

Wing

Fuel lot:

4

Fuelstat test lot:

HR 2 411

Bacteria:

Negligible

Fungi:

Heavy

Hormoconis resinae:

Negligible

Overall result:

Heavy

Test method:

ASTM D8070-16

Comments

Example test Report - Annual Maintenance Check

FUELSTAT® Result data interpretation and guidance

Alert level	Phase	Target antigen limits
Negligible	Fuel Water	Up to 150 µg/L Up to 33 µg/ml
Negligible — Maintain good housekeeping practices.		
Moderate	Fuel Water	Between 150-750 µg/L Between 33-166 µg/ml
Moderate — Repeat the test to confirm the result and increase the frequency of water drainage.		
Heavy	Fuel Water	Greater than 750 µg/L Greater than 166 µg/ml
Heavy — Consider remedial treatment, such as increased water drainage and/or biocide treatment. Seek further advice if required.		

Phone make:

Apple

Phone model:

iPhone 6s

App version:

Portal version:

1.2.2


Analysis approved by:

Disclaimer

FUELSTAT® Result is designed for use with tests which are fully compliant with ASTM D8070-16. However, readings obtained using FUELSTAT® Result are currently outside the scope of ASTM D8070-16. Operators should visually validate test results as per ASTM D8070-16. The accuracy of this report may be dependent on the accuracy of the sample provided. Full terms of use available on the Conidia Bioscience Ltd. website www.conidia.com. For Any Technical Assistance Telephone: +44 (0)1491 829102

Conidia Bioscience Limited: 3 Acorn Business Centre, Northbarrow Road, Cosham, Portsmouth, PO6 3TG, United Kingdom.

Registration number: 03965471 | VAT number: 760 2156 55 | www.conidia.com



CONIDIA

FUELSTAT® Report

3

- Traceability of testing
- Identification of hotspots for planning
- Proof of test, proof of result, proof of method

Organisation	Capture date	Engineer	Identity	Asset	Tank No	Test Lot #	Fuel Lot #
ACME plc	17/04/2017	eng10@acme.com	Test equ	ABC123	Left	1204	98765
ACME plc	17/05/2017	eng11@acme.com	Test equ	ABC123	Middle	1205	98765
ACME plc	17/06/2017	eng007@acme.com	Test equ	ABC123	Right	1206	98765

FUELSTAT®

Who we are:

FUELSTAT® fuel tests are developed, manufactured and marketed by Conidia Bioscience Limited. Based in UK, Conidia Bioscience Limited was founded in early 2000's by experts in immunoassay techniques and holds the internationally patented intellectual property for FUELSTAT®.

Where to find us:

FUELSTAT is distributed globally by a network of specialist distributors covering the major sectors. Contact info@conidia.com who will arrange for a distributor to support you.



HAMMONDS FUEL ADDITIVES, INC.

Houston, Texas • (800) 548-9166

www.biobor.com

T: +44 (0)1491 829 102 | E: info@conidia.com | W: www.conidia.com

FUELSTAT®, FUELSTAT® Plus and FUELSTAT® Result are registered trademarks of
Conidia Bioscience Ltd, Bakeham Lane, Egham, Surrey, TW20 9TY