


BIOBOR[®] DC Plus_{CETANE}

Diesel Fuel Conditioner

ASTM 6079 HFRR @ 60°C (µm) Wear Scar				
ULSD Diesel Fuel w/o any lubricity additive (sulfur content < 6.2 ppm)	Neat Diesel	Biobor [®] DC+Cetane @500 ppm	Wear Scar Reduction (µm)	Wear Scar Reduction (%)
	552	443	109	19.75%

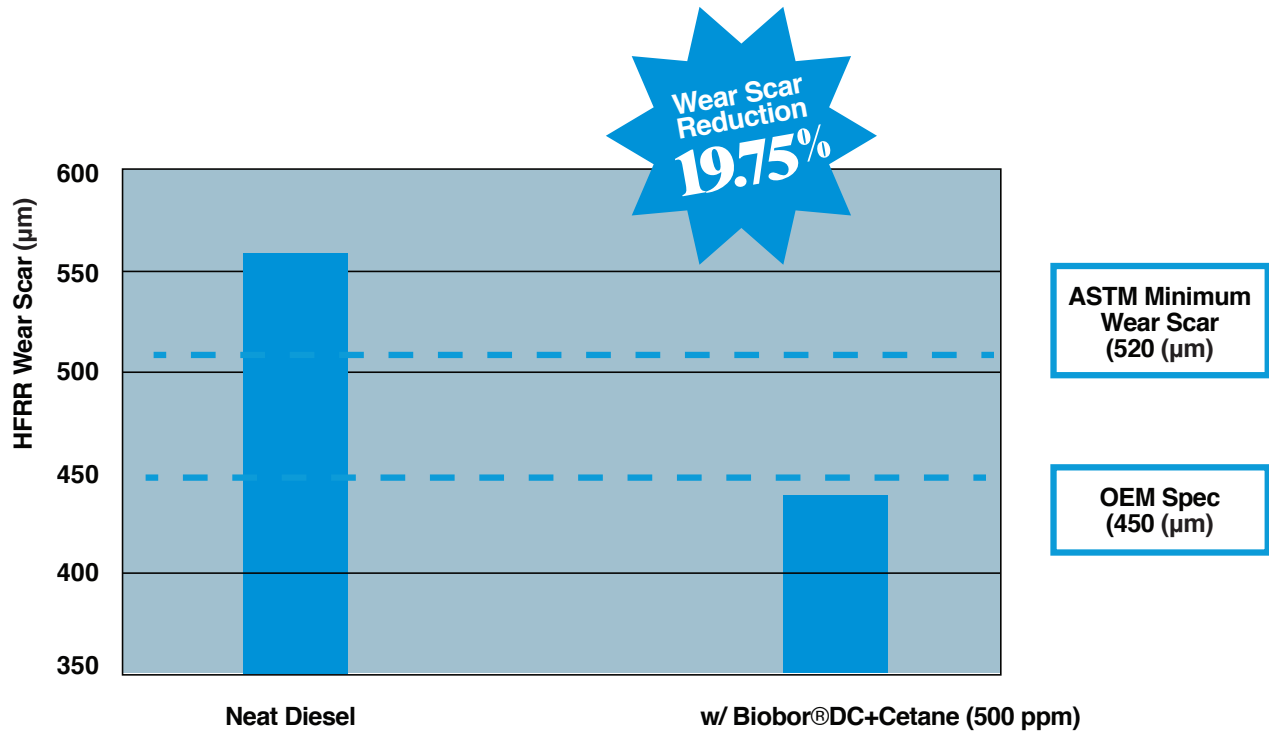

- ✓ **Wear scar reduction of 19.75%**
- ✓ **Raises Cetane levels**
- ✓ **Improves engine performance and fuel economy**
- ✓ **Cleans and protects injectors**
- ✓ **Controls water and prevents corrosion**
- ✓ **Prevents filter-plugging, particulates and extends storage life**